

**Overview**

- High efficiency solar cells (approx. 19%) with quality silicon material for long term output stability and reliability.
- Rigorous quality control to meet the highest international standards.
- High transmittance, low iron tempered glass with enhanced stiffness and impact resistance.
- Unique frame design with high mechanical strength for easy installation.
- Advanced encapsulation material with multilayer sheet lamination to provide long-life and enhanced cell performance.
- Outstanding electrical performance under high temperature and low irradiance conditions.

Applications

- Any large or small on-grid /off-grid solar power stations.
- Commercial/industrial building roof-top and ground systems.
- Residential roof-top and ground systems.

Warranty

- 10 year limited product warranty on materials and workmanship.
- 25 year warranty on >80% power output and 10 year warranty on >90% power output.
- Refer to warranty document for detailed warranty information.

Certifications

- UL-1703 ISO 9000:2000
- CE TUV IEC61215 IEC61730

**Mechanical Specifications**

Characteristic	Details
Cell Size	125mm x 125mm (4.93" x 4.93")
Module Dimension (L x W x T)	1195mm x 536mm x 40mm (47.0" x 21.1" x 1.57")
No. of Cells	4 x 9 = 36
Weight	8.0 kg (17.6 lbs)
Cable Length	900mm (35.4") for positive (+) and negative (-)
Type of Connector	MC-IV
Junction Box	IP65 Rated
No. of Holes on Frame	8 installation holes, 2 grounding holes, 8 air holes



Electrical Specifications

(STC* = 25 °C, 1000W/m² irradiance and AM=1.5)

Model	GS-S-100-Fab36	
Max System Voltage (IEC/UL)	1000V / 600V	
Maximum Power P _{max}	100 W (0%, +3%)	
Voltage at Maximum Power Point V _{mpp}	18.5 V	
Current at Maximum Power Point I _{mpp}	5.42 A	
Open Circuit Voltage V _{oc}	22.0 V	
Short Circuit Current I _{sc}	6.29 A	
Module Efficiency (%)	15.6%	
Temperature Coefficient of V _{oc}	-0.084 V/°C	(-0.38% /°C)
Temperature Coefficient of I _{sc}	3.2x10 ⁻³ A/°C	(0.05% /°C)
Temperature Coefficient of P _{max}	-0.50 W/°C	(-0.50% /°C)

*Standard Test Conditions

Physical Specifications mm (inch)

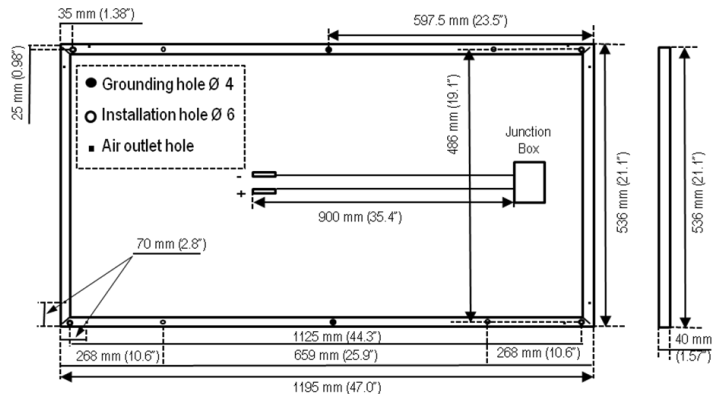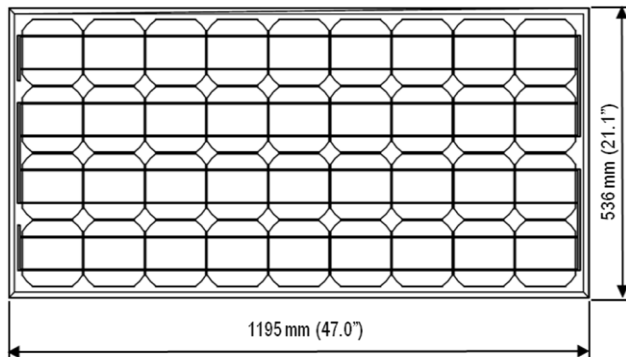

Other Performance Data

Power Tolerance	Operating Temperature	Max Series Fuse Rating	NOCT*
0%, +3%	-40 °C to +85 °C	10 A	46 °C ± 2 °C

*Normal Operating Cell Temperature

www.GrapeSolar.com

For service or support call

1-541-349-9000



1305 South Bertelsen Road
 Eugene, Oregon 97402, USA
 Tel: 541.349.9000 Fax: 541.343.9000